

Application

For heavy duty residential and commercial folding doors.

This section covers Weatherfold 4s 150 that accommodates thicker double glazed timber or aluminium panels weighing up to 150kg each.

The high-strength hinges are manufactured from 4mm thick stainless steel and are now available in a choice of Satin Stainless or PVD Black finish.

Weatherfold 4s 150 system comes standard within precision stainless steel bearings for maximum corrosion resistance.

Door Specifications

Track System:

Max Panel Height
Max Panel Weight
Max Panel Width
Panel Thickness
Max No. of Panels

Weatherfold 4s 150

4000mm
150kg
1200mm
44-68mm
8 each direction

Hardware Specifications - Timber Panels

Track:

Material
Standard Lengths

700
Aluminium Clear Anodised
4000mm and 6000mm

Hanger Sets:

Intermediate Hanger Set:

Includes Hanger, Guide and Hinge
BWS4-150SH

End Hanger Set:

Includes Hanger and Guide
BWS2-150SH

Pivot Sets:

Top & Bottom Pivots
BWS1-150H

Jamb Pivot:

BW789H

Hinge Sets:

Hinge Handle Set
Offset Hinge Handle Set
Hinge Set
Offset Hinge Set

BW3-150H
BW5-150H
BW6-150H
BW7-150H

Channels:

Polyprop Plus Support
Standard lengths

98PPA
4000mm and 6000mm


Accessories:

Flush Pull
Flush Bolt - 190mm
Flush Bolt - 450mm
Flush Bolt - 600mm
Flush Bolt - 1000mm
Flush Bolt - 190mm Bottom Inward Opening
Flush Bolt - 190mm Top Necked
Flush Bolt - 600mm Top Necked
Flush Bolt - 1000mm Top Necked
Mortice Lock
Frame Seal - White
Frame Seal - Brown
Door Seal - White
Door Seal - Brown
Track Seal

401
456R
456RL
456RLX-600
456RLX-1000
456RIH
456RNH
456RLNH
456RNXH
6200
AQ21W
AQ21B
AQ33W
AQ33B
PS13B

Finish options

Hardware: (SS) Satin Stainless.
Flushbolts: (SN) Satin Nickel.

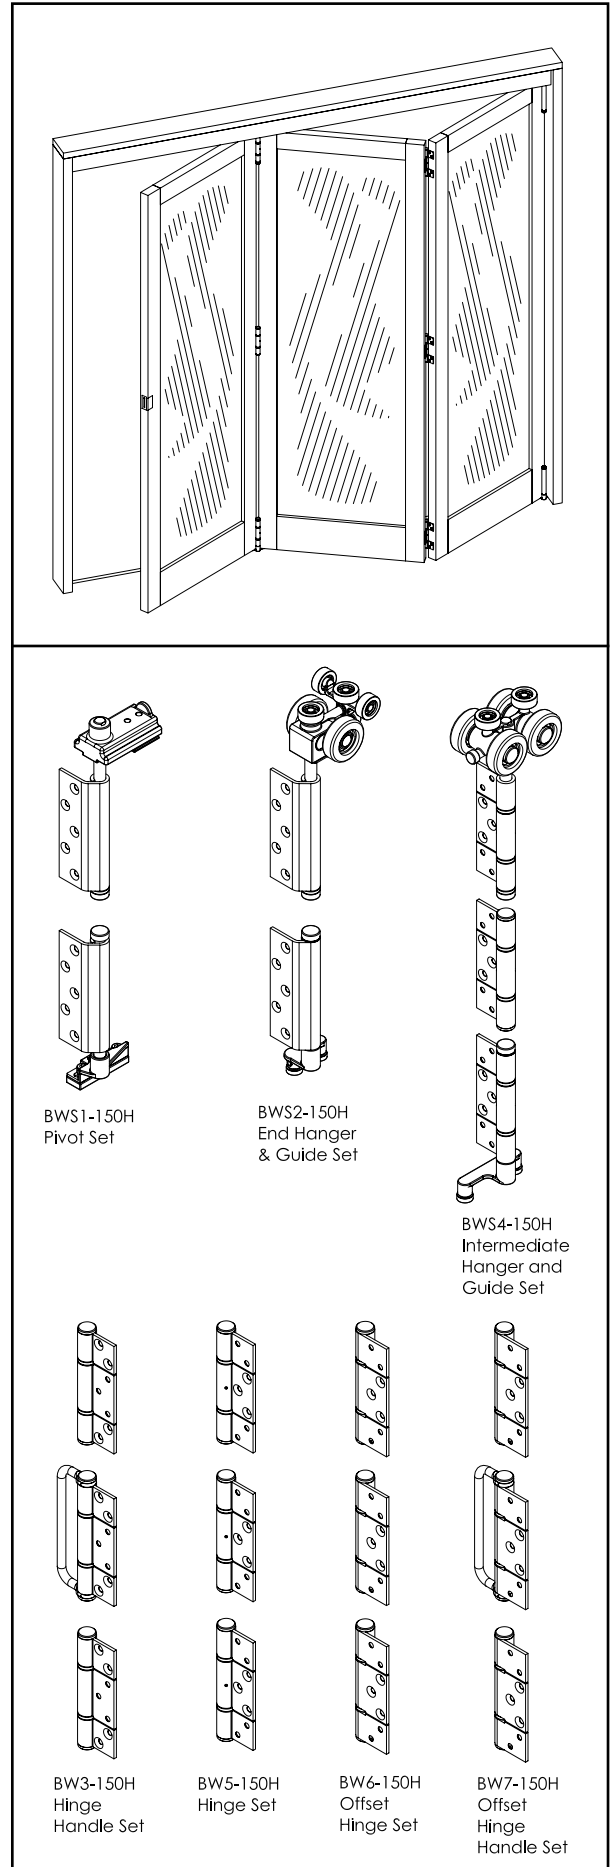

WEATHERFOLD 4s 150 (FOR TIMBER DOORS)

